

4120 (JQC-4)



Dust Covered
26.8×21.5×22.3



Open Type
24×19×20

Features

- Small size, heavy contact load, capable of standing strong current of 40A at 14VDC.
- PC board mounting.
- Suitable for automatic control facilities and automobile application etc.
- Both European 11mm pole distance and American 8mm pole distance available.

Ordering Information

4120 C S 30 DC12V 1.6
1 2 3 4 5 6

1 Part number: 4120 (JQC-4)

2 Contact arrangement: A:1A; B:1B; C:1C

3 Enclosure: S: Sealed type; Z: Dust cover
O: Open type

4 Contact current: 15:15A; 20:20A; 30:30A; 40:40A

5 Coil rated voltage(V): DC:6,9,12,18,24

6 Coil power consumption: 1.6:1.6W; 1.9:1.9W

Contact Data

Contact Arrangement	1A (SPSTNO) 1B (SPSTNC) 1C (SPDT(B-M))		
Contact Material	AgNi AgSnO ₂ AgCdO AgSnO ₂ In ₂ O ₃		
Contact Rating (resistive)	1A: 40A/14VDC; 1B: 30A/14VDC; 1C:20A/120VAC, 15A/28VDC, NO: 40A/14VDC ,NC: 30A/14VDC		
Max. Switching Power	460W 2400VA		
Max. Switching Voltage	75VDC 380VAC		
Contact Resistance or Voltage drop	<30mΩ		
Operation life	Electrical	10 ⁵	Item 3.30 of IEC255-7
	Mechanical	10 ⁷	Item 3.31 of IEC255-7

Coil Parameter

Dash numbers	Coil voltage VDC		Coil resistance Ω ±10%	Pickup voltage VDC(max) (70%of rated voltage)	Release voltage VDC(min) (10% of rated voltage)	Coil power consumption W	Operate Time ms	Release Time ms
	Rated	Max.						
006-1900 009-1900	6 9	7.8 11.7	19 42.6	4.20 6.30	0.6 0.9	1.9	<5	<3
012-1600 018-1600 024-1600	12 18 24	15.6 23.4 31.2	90 202.5 360	8.40 12.6 16.8	1.2 1.8 2.4	1.6		

CAUTION: 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
2.Pickup and release voltage are for test purposes only and are not to be used as design criteria.

Operation condition


Insulation Resistance	100M Ω min (at 500VDC)	Item 7 of IEC255-5
Dielectric Strength		
Between contacts	50Hz 500V	Item 6 of IEC255-5
Between contact and coil	50Hz 750V	Item 6 of IEC255-5
Shock resistance	200m/s ² 11ms	IEC68-2-27 Test Ea
Vibration resistance	10~40Hz double amplitude 1.27mm	IEC68-2-6 Test Fc
Terminals strength	10N	IEC68-2-21 Test Ua1
Solderability	235 $^{\circ}$ C $\pm$ 2 $^{\circ}$ C 3 $\pm$ 0.5s	IEC68-2-20 Test Ta method 1
Ambient Temperature	-40~105 $^{\circ}$ C	
Relative Humidity	85% (at 40 $^{\circ}$ C)	IEC68-2-3Test Ca
Mass	19g (Open type) 21g	

Qualification inspection:

Perform the qualification test as specified in the table IV of IEC255-19-1 and minimum sample size 24.

Dimensions

mm /inch

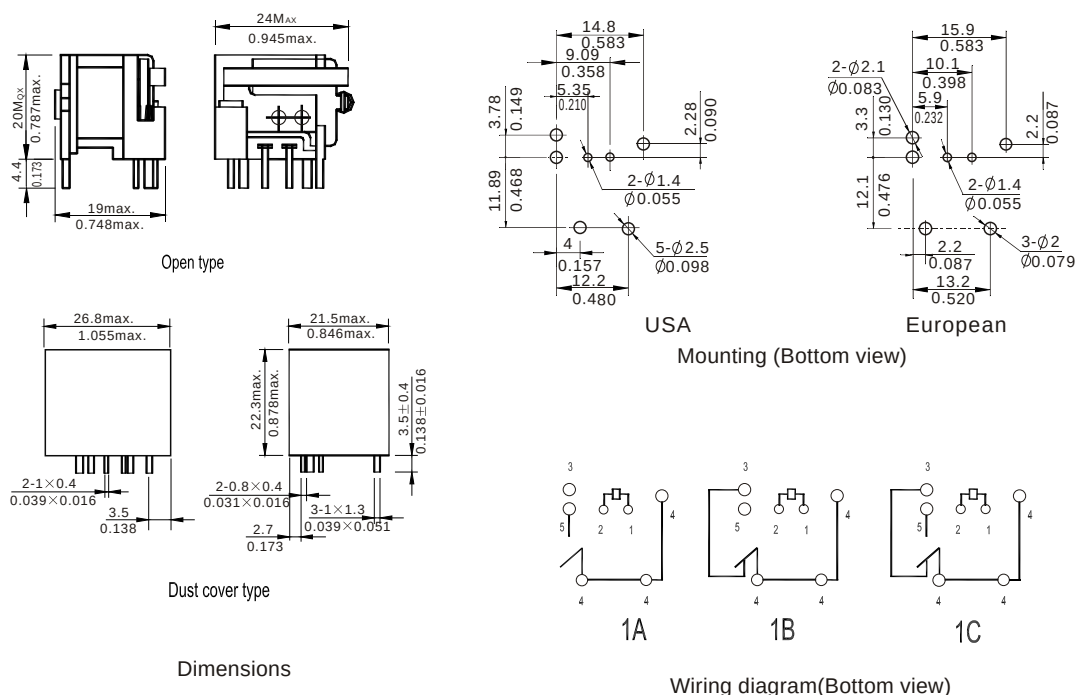

NOTES 1).Dimensions are in millimeters.

2).Inch equivalents are given for general information only.

Reference Data

